




**00T6030B026HT20**

110 Delta Drive  
Pittsburgh, PA 15238  
NAFTA Sales: (1)800-245-3984  
HK Sales : (852)3102-9337  
magnetics@spang.com  
www.mag-inc.com

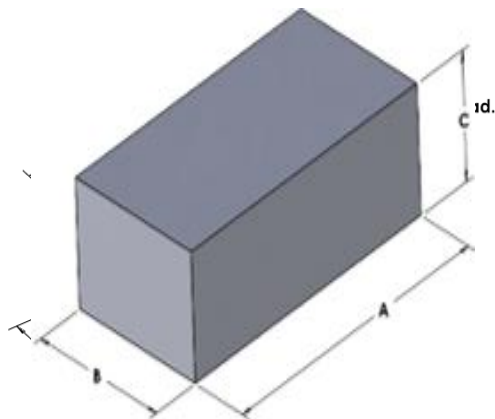

| Xflux Ultra<br>Permeability ( $\mu$ ) | Core Marking |               |
|---------------------------------------|--------------|---------------|
|                                       | Lot Number   | Part Number   |
| 26                                    | XXXXXX       | T6030B026HT20 |

|   | Dimensions |      | Tolerance ( $\pm$ ) |      |  | Packaging |
|---|------------|------|---------------------|------|--|-----------|
|   | (mm)       | (in) | (mm)                | (in) |  |           |
| A | 60.00      | 2.36 | 0.50                | 0.02 |  | 64 pcs    |
| B | 30.00      | 1.18 | 0.30                | 0.01 |  |           |
| C | 20.00      | 0.79 | 0.20                | 0.01 |  |           |

| Physical Characteristics        |                 | Temperature Rating |        | Note                                                                    |
|---------------------------------|-----------------|--------------------|--------|-------------------------------------------------------------------------|
| Volume $V_e$ (mm <sup>3</sup> ) | Est. Weight (g) | Curie Temp:        | 700 °C | Cosmetic Standard: Magnetics Xflux Ultra shapes criteria for appearance |
| 36,000                          | 223             |                    |        |                                                                         |

